


## Product Data Sheet

Tefsil 5

Reference:	<b>Tefsil 5</b>	Thickness:	<b>0.115mm</b>
Glass Style:	<b>Singles</b>	Weave:	<b>Plain</b>
Base Weight:	<b>106g/m<sup>2</sup></b>	Coated Weight:	<b>230g/m<sup>2</sup></b>
PTFE Coating:	<b>54%</b>	Surface Texture:	<b>Smooth</b>
Tensile Warp:	<b>270</b>	Tensile Weft:	<b>240</b>

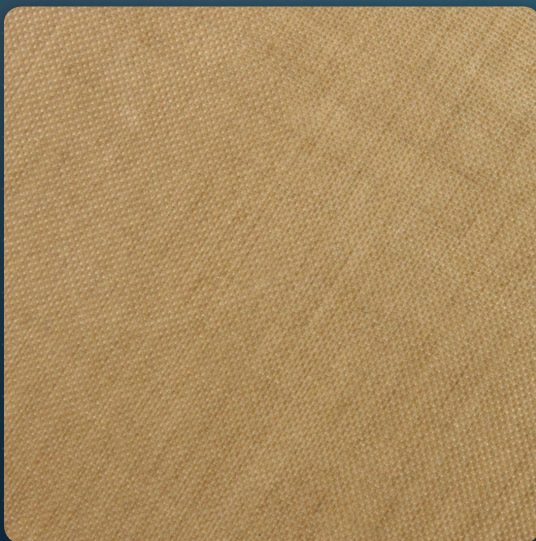

### Material Properties

- Extremes of heat and cold resistance: Minus  $-73^{\circ}\text{C}$  to  $+260^{\circ}\text{C}$
- Chemical inertness: Affected only by a few rare substances at very high temperatures
- High Release from sticky materials 'Non-Stick'
- Easy cleaning (Nothing bonds permanently)
- Low friction co-efficient: 0.04 – 0.10; depending on load and surface speed
- Chemical corrosion and moisture resistance
- Mildew and fungus resistance
- Ultra-Violet, Infra-Red, Micro-Wave, Radio Frequency resistance
- Non Combustible – Self Extinguishing
- Low Thermal Expansion:  $<5\%$
- Food Approval (USFDA)
- Lightweight and energy efficient for economical operation

### Additional Information

Availability: This material as available ex stock and can be supplied at any width from 3mm up to 2600mm wide.

Fabric Care: Do not fold or crease when handling and installing. The fabric can eventually discolour in sunlight (turns white), but otherwise is unaffected by biological or chemical agents, heat or cold within its temperature range, or by most areas of the electric magnetic spectrum.

The material can be converted to engineered product. Consult our Technical staff for further details. Also available chemically etched one side for proprietary adhesive bonding. Standard etch is silica based, sodium based etch is available on request

PTFE (Teflon®) begins to soften at  $260^{\circ}\text{C}$ , increasing wear rate. Somewhat above  $300^{\circ}\text{C}$ , fumes are given off and these should not be inhaled. COSHH data is available upon request. After contact wash hands thoroughly before handling or smoking tobacco.